

AD-A048 651

FOREIGN TECHNOLOGY DIV WRIGHT-PATTERSON AFB OHIO
THE MOVEMENT OF A WING WITH DEFLECTED AILERONS CLOSE TO A SCREE--ETC(U)
JUL 77 V G BELINSKIY, Y I LAPTEV

F/G 20/4

UNCLASSIFIED

FTD-ID(RS)T-1238-77

NL

1 of 1
AD
A048651



END
DATE
FILMED

2-78

DDC

AD-A048651

FTD-ID(RS)T-1238-77

1


FOREIGN TECHNOLOGY DIVISION



THE MOVEMENT OF A WING WITH DEFLECTED
AILERONS CLOSE TO A SCREEN

by

V. G. Belinskiy, Yu. I. Laptev



Approved for public release;
distribution unlimited.



ACCESSION for	
NTIS	White Section <input checked="" type="checkbox"/>
DDC	Defi Section <input type="checkbox"/>
UNANNOUNCED	<input type="checkbox"/>
JUSTIFICATION	
BY	
DISTRIBUTION/AVAILABILITY CODES	
Dist.	AVAIL. and/or SPECIAL
A	

FTD-ID(RS)T-1238-77

EDITED TRANSLATION

FTD-ID(RS)T-1238-77

16 July 1977

MICROFICHE NR:

AD-77-C-000868

THE MOVEMENT OF A WING WITH DEFLECTED AILERONS
CLOSE TO A SCREEN

By: V. G. Belinskiy, YU. I. Laptev

English pages: 11

Source: Gidrodinamika Bol'shikh Skorostey, Izd-
vo "Naukova Dumka" Nr 4, 1968, PP. 39-48

Country of origin: USSR

Translated by: Bernard L. Tauber

Requester: FTD/PDRS

Approved for public release; distribution unlimited.

THIS TRANSLATION IS A RENDITION OF THE ORIGINAL FOREIGN TEXT WITHOUT ANY ANALYTICAL OR EDITORIAL COMMENT. STATEMENTS OR THEORIES ADVOCATED OR IMPLIED ARE THOSE OF THE SOURCE AND DO NOT NECESSARILY REFLECT THE POSITION OR OPINION OF THE FOREIGN TECHNOLOGY DIVISION.

PREPARED BY:

TRANSLATION DIVISION
FOREIGN TECHNOLOGY DIVISION
WP-AFB, OHIO.

FTD ID(RS)T-1238-77

Date 16 July 1977

U. S. BOARD ON GEOGRAPHIC NAMES TRANSLITERATION SYSTEM

Block	Italic	Transliteration	Block	Italic	Transliteration
А а	А а	A, a	Р р	Р р	R, r
Б б	Б б	B, b	С с	С с	S, s
В в	В в	V, v	Т т	Т т	T, t
Г г	Г г	G, g	У у	У у	U, u
Д д	Д д	D, d	Ф ф	Ф ф	F, f
Е е	Е е	Ye, ye; E, e*	Х х	Х х	Kh, kh
Ж ж	Ж ж	Zh, zh	Ц ц	Ц ц	Ts, ts
З з	З з	Z, z	Ч ч	Ч ч	Ch, ch
И и	И и	I, i	Ш ш	Ш ш	Sh, sh
Й й	Й й	Y, y	Щ щ	Щ щ	Shch, shch
К к	К к	K, k	Ъ ъ	Ъ ъ	"
Л л	Л л	L, l	Ы ы	Ы ы	Y, y
М м	М м	M, m	Ь ь	Ь ь	'
Н н	Н н	N, n	Э э	Э э	E, e
О о	О о	O, o	Ю ю	Ю ю	Yu, yu
П п	П п	P, p	Я я	Я я	Ya, ya

*ye initially, after vowels, and after ъ, ь; e elsewhere.
 When written as ё in Russian, transliterate as yë or ë.
 The use of diacritical marks is preferred, but such marks may be omitted when expediency dictates.

GREEK ALPHABET

Alpha	A α α	Nu	N ν
Beta	B β	Xi	Ξ ξ
Gamma	Γ γ	Omicron	O ο
Delta	Δ δ	Pi	Π π
Epsilon	E ε ε	Rho	Ρ ρ ϱ
Zeta	Z ζ	Sigma	Σ σ Ϻ
Eta	H η	Tau	Τ τ
Theta	Θ θ ϑ	Upsilon	Υ υ
Iota	I ι	Phi	Φ φ ϕ
Kappa	K κ κ	Chi	Χ χ
Lambda	Λ λ	Psi	Ψ ψ
Mu	M μ	Omega	Ω ω

RUSSIAN AND ENGLISH TRIGONOMETRIC FUNCTIONS

Russian	English
---------	---------

sin	sin
-----	-----

cos	cos
-----	-----

tg	tan
----	-----

ctg	cot
-----	-----

sec	sec
-----	-----

cosec	csc
-------	-----

sh	sinh
----	------

ch	cosh
----	------

th	tanh
----	------

cth	coth
-----	------

sch	sech
-----	------

csch	csch
------	------

arc sin	\sin^{-1}
---------	-------------

arc cos	\cos^{-1}
---------	-------------

arc tg	\tan^{-1}
--------	-------------

arc ctg	\cot^{-1}
---------	-------------

arc sec	\sec^{-1}
---------	-------------

arc cosec	\csc^{-1}
-----------	-------------

arc sh	\sinh^{-1}
--------	--------------

arc ch	\cosh^{-1}
--------	--------------

arc th	\tanh^{-1}
--------	--------------

arc cth	\coth^{-1}
---------	--------------

arc sch	sech^{-1}
---------	----------------------------

arc csch	csch^{-1}
----------	----------------------------

rot	curl
-----	------

lg	log
----	-----

GRAPHICS DISCLAIMER

All figures, graphics, tables, equations, etc. merged into this translation were extracted from the best quality copy available.

FIRST LINE OF TEXT

THE MOVEMENT OF A WING WITH DEFLECTED AILERONS CLOSE TO A SCREEN

V. G. Belinskiy, Yu. I. Laptev
(Institute of Hydromechanics of the Academy of Sciences Ukrainian SSR)

The movement of a wing with deflected ailerons in a boundless fluid has been investigated by many authors [1, 2 and others]. However, the effect of the flow boundaries on the characteristics of such a wing has been insufficiently studied.

The effect of a free surface on the characteristics of an underwater wing with deflected ailerons was investigated by T. Nishiyama [4]; he showed that the proximity of a free surface decreases the lift and rolling moment but increases the induced drag and the yawing moment.

This work has obtained simple analytical dependences which permit estimating the effect of the proximity of a solid screen on the hydrodynamic characteristics of a wing with deflected ailerons.

The distribution of the circulation along the span of a horizontal wing with a large aspect ratio which is moving steadily at a velocity of v_0 over a distance H_0 from a plane solid screen (Fig. 1) is determined by the equation [3]

$$\Gamma(\bar{y}) = \frac{a_0}{2\lambda(\bar{y})} \psi(\bar{y}) \left\{ \alpha(\bar{y}) + \frac{1}{2\pi} \int_{-1}^{+1} \Gamma(\bar{\eta}) \left[\frac{1}{(\bar{y} - \bar{\eta})^2} - \frac{\bar{y} - \bar{\eta}^2 - 4H_0^2}{(\bar{y} - \bar{\eta})^2 + 4H_0^2} \right] d\bar{\eta} \right\}. \quad (1)$$

Here a_0 - the tangent of the angle of slope of the relation $C_y = C_y(\alpha)$ for a boundless fluid; $\psi(\bar{y})$ - the function which considers the change a_0 in a limited flow; where $\alpha(y)$ - the angle of attack of the wing;

$$\Gamma(\bar{y}) = \frac{\Gamma(\bar{y})}{\lambda B a_0}; \quad \bar{y} = \frac{2y}{L}; \quad \bar{z} = \frac{2z}{B}; \quad H_0 = \frac{2H}{L};$$

$\lambda(\bar{y})$ - the aspect angle of the wing equal to L/B (L - the wing span, B - the wing chord).

Let us consider the case where such a wing moves when the ailerons have been deflected by a small angle. We will assume that the deflection of the ailerons by a small angle is equivalent to some twisting of the wing. The deformation of the wing with the deflection of the ailerons leads to an asymmetrical distribution of circulation along the span. We present the circulation in the form of symmetrical and asymmetrical parts

$$\Gamma(\bar{y}) = \Gamma_s(\bar{y}) + \Gamma_a(\bar{y}) = \frac{\Gamma(\bar{y}) + \Gamma(-\bar{y})}{2} + \frac{\Gamma(\bar{y}) - \Gamma(-\bar{y})}{2}. \quad (2)$$

Similarly, we write the angle of attack of a deformed wing

$$\alpha(\bar{y}) = \alpha_s(\bar{y}) + \alpha_a(\bar{y}) = \frac{\alpha(\bar{y}) + \alpha(-\bar{y})}{2} + \frac{\alpha(\bar{y}) - \alpha(-\bar{y})}{2}, \quad (3)$$

where $\alpha_s(\bar{y})$ is the wing's angle of attack with undeflected ailerons; $\alpha_a(\bar{y})$ is the angle of twist of the wing which considers the deflection of the ailerons.

The Kernal of equation (1) can also be presented in the form of a symmetrical and asymmetrical parts:

$$G(\bar{y}, \bar{\eta}) = G_s(\bar{y}, \bar{\eta}) + G_a(\bar{y}, \bar{\eta}),$$

In turn

$$\begin{aligned} G_s(\bar{y}, \bar{\eta}) &= G_{ss}(\bar{y}, \bar{\eta}) + G_{sa}(\bar{y}, \bar{\eta}); \\ G_a(\bar{y}, \bar{\eta}) &= G_{as}(\bar{y}, \bar{\eta}) + G_{aa}(\bar{y}, \bar{\eta}). \end{aligned} \quad (4)$$

Analysis shows that in this case

$$G_{sa}(\bar{y}, \bar{\eta}) = G_{as}(\bar{y}, \bar{\eta}) = 0. \quad (5)$$

Considering formulas (2)-(5), equation (1) can be reduced to two independent equations which determine the symmetrical and asymmetrical parts of the circulation:

$$\Gamma_s(\bar{y}) = \frac{a_2}{2\lambda(\bar{y})} \psi(\bar{y}) \left\{ a_s(\bar{y}) + \frac{1}{2\pi} \int_{-1}^{+1} \Gamma_s(\bar{\eta}) G_{ss}(\bar{y}, \bar{\eta}) d\bar{\eta} \right\}; \quad (6)$$

$$\Gamma_a(\bar{y}) = \frac{a_2}{2\lambda(\bar{y})} \psi(\bar{y}) \left\{ a_a(\bar{y}) + \frac{1}{2\pi} \int_{-1}^{+1} \Gamma_a(\bar{\eta}) G_{aa}(\bar{y}, \bar{\eta}) d\bar{\eta} \right\}. \quad (7)$$

where

$$\begin{aligned} G_{ss}(\bar{y}, \bar{\eta}) &= \frac{1}{2} \left\{ \frac{1}{(\bar{y} - \bar{\eta})^2} - \frac{(\bar{y} - \bar{\eta})^2 - 4\bar{H}_0^2}{[(\bar{y} - \bar{\eta})^2 + 4\bar{H}_0^2]^2} + \right. \\ &\quad \left. + \frac{1}{(\bar{y} + \bar{\eta})^2} - \frac{(\bar{y} + \bar{\eta})^2 - 4\bar{H}_0^2}{[(\bar{y} + \bar{\eta})^2 + 4\bar{H}_0^2]^2} \right\}; \\ G_{aa}(\bar{y}, \bar{\eta}) &= \frac{1}{2} \left\{ \frac{1}{(\bar{y} - \bar{\eta})^2} - \frac{(\bar{y} - \bar{\eta})^2 - 4\bar{H}_0^2}{[(\bar{y} - \bar{\eta})^2 + 4\bar{H}_0^2]^2} - \right. \\ &\quad \left. - \frac{1}{(\bar{y} + \bar{\eta})^2} + \frac{(\bar{y} + \bar{\eta})^2 - 4\bar{H}_0^2}{[(\bar{y} + \bar{\eta})^2 + 4\bar{H}_0^2]^2} \right\}. \end{aligned}$$

But with $\bar{H}_0 \rightarrow \infty$ equations (6) and (7) have the form

$$\Gamma_s(\bar{y}) = \frac{a_2}{2\lambda(\bar{y})} \left\{ a_s(\bar{y}) + \frac{1}{4\pi} \int_{-1}^{+1} \Gamma_s(\bar{\eta}) \left[\frac{1}{(\bar{y} - \bar{\eta})^2} + \frac{1}{(\bar{y} + \bar{\eta})^2} \right] d\bar{\eta} \right\}; \quad (8)$$

$$\Gamma_a(\bar{y}) = \frac{a_2}{2\lambda(\bar{y})} \left\{ a_a(\bar{y}) + \frac{1}{4\pi} \int_{-1}^{+1} \Gamma_a(\bar{\eta}) \left[\frac{1}{(\bar{y} - \bar{\eta})^2} - \frac{1}{(\bar{y} + \bar{\eta})^2} \right] d\bar{\eta} \right\}. \quad (9)$$

For a wing of elliptical form in a plane, we present the approximate solutions of equations (6)-(9). In accordance with this, we assume

$$\frac{\psi(\bar{y})}{\lambda(\bar{y})} = \frac{4\psi}{\pi\lambda_0} \sqrt{1-\bar{y}^2}. \quad (10)$$

We will look for the solutions to the equations in the form

$$\begin{aligned} \Gamma_c(\bar{y}) &= A \sqrt{1-\bar{y}^2}, \\ \Gamma_s(\bar{y}) &= B \bar{y} \sqrt{1-\bar{y}^2}, \end{aligned} \quad (11)$$

where A and B are constants.

Integrating by parts, we reduce equations (8) and (9) to the integral-differential form:

$$\Gamma_c(\bar{y}) = \frac{a_0}{2\lambda(\bar{y})} \left\{ \alpha_0(\bar{y}) - \frac{1}{4\pi} \int_{-1}^{+1} \Gamma_c(\bar{\eta}) \left[\frac{1}{\bar{y}-\bar{\eta}} - \frac{1}{\bar{y}+\bar{\eta}} \right] d\bar{\eta} \right\}; \quad (12)$$

$$\Gamma_s(\bar{y}) = \frac{a_0}{2\lambda(\bar{y})} \left\{ \alpha_0(\bar{y}) - \frac{1}{4\pi} \int_{-1}^{+1} \Gamma_s(\bar{\eta}) \left[\frac{1}{\bar{y}-\bar{\eta}} + \frac{1}{\bar{y}+\bar{\eta}} \right] d\bar{\eta} \right\}. \quad (13)$$

In the solution of equation (12) we consider that $\omega_0(\bar{y}) = \alpha$, where α is the angle of attack of a wing with undeflected ailerons.

Solution of this equation with consideration of equalities (10) and (11) provides

$$A_0 = \frac{\frac{2a_0}{\pi\lambda_0} \alpha}{1 + \frac{a_0}{\pi\lambda_0}}. \quad (14)$$

As a result of the solution of equation (13) with consideration of expressions (10) and (11) we obtain the linear law of distribution for the twist angle of a deformed wing along the span

$$\alpha_s(\bar{y}) = \alpha_n \bar{y}, \quad (15)$$

where α_n is the twist angle of the end section of a deformed wing.

Here, constant B_∞ is determined by the formula

$$B_\infty = \frac{\frac{2a_0}{\pi \lambda_0} \alpha_n}{1 + \frac{2a_0}{\pi \lambda_0}}, \quad (16)$$

After integration by parts equations (6) and (7) are reduced to the integral-differential form:

$$\begin{aligned} \bar{\Gamma}_s(\bar{y}) = \frac{a_0}{2\lambda(\bar{y})} \psi(\bar{y}) \left\{ \alpha_n(\bar{y}) - \frac{1}{4\pi} \int_{-1}^{+1} \bar{\Gamma}'_s(\bar{\eta}) \left[\frac{1}{\bar{y} - \bar{\eta}} - \right. \right. \\ \left. \left. - \frac{\bar{y} - \bar{\eta}}{\bar{y} - \bar{\eta}^2 + 4H_0^2} - \frac{1}{\bar{y} + \bar{\eta}} + \frac{\bar{y} + \bar{\eta}}{\bar{y} + \bar{\eta}^2 + 4H_0^2} \right] d\bar{\eta} \right\}; \end{aligned} \quad (17)$$

$$\begin{aligned} \bar{\Gamma}_s(\bar{y}) = \frac{a_0}{2\lambda(\bar{y})} \psi(\bar{y}) \left\{ \alpha_n(\bar{y}) - \frac{1}{4\pi} \int_{-1}^{+1} \bar{\Gamma}'_s(\bar{\eta}) \left[\frac{1}{\bar{y} - \bar{\eta}} - \right. \right. \\ \left. \left. - \frac{\bar{y} - \bar{\eta}}{\bar{y} - \bar{\eta}^2 + 4H_0^2} + \frac{1}{\bar{y} + \bar{\eta}} - \frac{\bar{y} + \bar{\eta}}{\bar{y} + \bar{\eta}^2 + 4H_0^2} \right] d\bar{\eta} \right\}. \end{aligned} \quad (18)$$

Solving these equations with consideration of expressions (10) and (11) and accepting the linear law of distribution of a wing twist angle along the span, we obtain the following formulas for the determination of constants A_H and B_H :

FIRST LINE OF TEXT

$$A_H = \frac{\frac{2a_0\psi}{\pi\lambda_0} \alpha}{1 + \frac{a_0\psi}{\pi\lambda_0} \zeta_1}; \quad (19)$$

$$B_H = \frac{\frac{2a_0\psi}{\pi\lambda_0} \alpha_x}{1 + \frac{2a_0\psi}{\pi\lambda_0} \zeta_2}. \quad (20)$$

In these formulas

$$\zeta_1 = 1 + \frac{1}{\pi^2} \int_{-1}^{+1} \sqrt{1-\bar{y}^2} d\bar{y} \int_{-1}^{+1} \frac{\bar{\eta}}{\sqrt{1-\bar{\eta}^2}} \left[\frac{\bar{y}-\bar{\eta}}{(\bar{y}-\bar{\eta})^2 + 4H_0^2} - \frac{\bar{y}+\bar{\eta}}{(\bar{y}+\bar{\eta})^2 + 4H_0^2} \right] d\bar{\eta}; \quad (21)$$

$$\zeta_2 = 1 - \frac{2}{\pi^2} \int_{-1}^{+1} \bar{y} \sqrt{1-\bar{y}^2} d\bar{y} \int_{-1}^{+1} \left[\frac{1}{\sqrt{1-\bar{\eta}^2}} - \frac{2\bar{\eta}}{\sqrt{1-\bar{\eta}^2}} \right] \times \\ \times \left[\frac{\bar{y}-\bar{\eta}}{(\bar{y}-\bar{\eta})^2 + 4H_0^2} + \frac{\bar{y}+\bar{\eta}}{(\bar{y}+\bar{\eta})^2 + 4H_0^2} \right] d\bar{\eta}. \quad (22)$$

Coefficients of lift, induced drag, rolling moment, and yawing moment are found from the expressions

$$\left. \begin{aligned} C_L &= \lambda_0 \int_{-1}^{+1} \Gamma_c(\bar{y}) d\bar{y}; \\ C_{L'} &= \lambda_0 \int_{-1}^{+1} [\bar{v}_n \Gamma_c(\bar{y}) + \bar{v}_{n'} \Gamma_c(\bar{y})] d\bar{y}; \\ C_{m_x} &= \frac{1}{2} \lambda_0 \int_{-1}^{+1} \bar{y} \Gamma_c(\bar{y}) d\bar{y}; \\ C_{m_y} &= \frac{1}{2} \lambda_0 \int_{-1}^{+1} \bar{y} [\bar{v}_n \Gamma_c(\bar{y}) + \bar{v}_{n'} \Gamma_c(\bar{y})] d\bar{y}. \end{aligned} \right\} \quad (23)$$

STOP HERE

STOP HERE

Here \bar{v}_{1c} and \bar{v}_{1a} are the symmetrical and asymmetrical parts of the induced velocity \bar{v}_1 . For these values, we have the expressions

$$\begin{aligned}\bar{v}_{1c} &= -\frac{1}{4\pi} \int_{-1}^{+1} \Gamma_s(\bar{\eta}) \left[\frac{1}{(\bar{y}-\bar{\eta})^2} + \frac{1}{(\bar{y}+\bar{\eta})^2} \right] d\bar{\eta}; \\ \bar{v}_{1a} &= -\frac{1}{4\pi} \int_{-1}^{+1} \Gamma_a(\bar{\eta}) \left[\frac{1}{(\bar{y}-\bar{\eta})^2} - \frac{1}{(\bar{y}+\bar{\eta})^2} \right] d\bar{\eta}; \\ \bar{v}_{1cH} &= -\frac{1}{4\pi} \int_{-1}^{+1} \Gamma_c(\bar{\eta}) \left\{ \frac{1}{(\bar{y}-\bar{\eta})^2} - \frac{(\bar{y}-\bar{\eta})^2 - 4H_0^2}{[(\bar{y}-\bar{\eta})^2 + 4H_0^2]^2} + \right. \\ &\quad \left. + \frac{1}{(\bar{y}+\bar{\eta})^2} - \frac{(\bar{y}+\bar{\eta})^2 - 4H_0^2}{[(\bar{y}+\bar{\eta})^2 + 4H_0^2]^2} \right\} d\bar{\eta}; \\ \bar{v}_{1aH} &= -\frac{1}{4\pi} \int_{-1}^{+1} \Gamma_a(\bar{\eta}) \left\{ \frac{1}{(\bar{y}-\bar{\eta})^2} - \frac{(\bar{y}-\bar{\eta})^2 - 4H_0^2}{[(\bar{y}-\bar{\eta})^2 + 4H_0^2]^2} - \right. \\ &\quad \left. - \frac{1}{(\bar{y}+\bar{\eta})^2} + \frac{(\bar{y}+\bar{\eta})^2 - 4H_0^2}{[(\bar{y}+\bar{\eta})^2 + 4H_0^2]^2} \right\} d\bar{\eta}.\end{aligned}\quad (24)$$

Substituting equations (11) and (24) into expression (23) and considering formulas (14), (16), (19), and (20), we obtain the following formulas for the characteristics of a wing with deflected ailerons:

with motion in a boundless fluid

$$\begin{aligned}C_{F_{\infty}} &= \frac{a_0 a_\pi}{1 + \frac{a_0}{\pi \lambda_0}}; \\ C_{m_{F_{\infty}}} &= \frac{\frac{1}{8} a_0 a_\pi}{1 + \frac{a_0}{\pi \lambda_0}}; \\ C_{x_{F_{\infty}}} &= \frac{1}{\pi \lambda_0} (C_{F_{\infty}}^2 + 32 C_{m_{F_{\infty}}}^2); \\ C_{m_{x_{F_{\infty}}}} &= \frac{3}{\pi \lambda_0} C_{F_{\infty}} C_{m_{F_{\infty}}};\end{aligned}\quad (25)$$

with the motion close to a solid screen

$$\left. \begin{aligned}
 C_{yH} &= \frac{a_0 \psi \alpha}{1 + \frac{a_0 \psi}{\pi \lambda_0} \zeta_1}; \\
 C_{mxH} &= \frac{\frac{1}{8} a_0 \psi \alpha_\kappa}{1 + \frac{2a_0 \psi}{\pi \lambda_0} \zeta_3}; \\
 C_{xH} &= \frac{1}{\pi \lambda_0} [C_{yH}^2 \zeta_1 + 32 C_{mxH}^2 \zeta_3]; \\
 C_{mzH} &= \frac{1}{\pi \lambda_0} C_{yH} C_{mxH} [2\zeta_4 + \zeta_5].
 \end{aligned} \right\} \quad (26)$$

The function ζ_3 is determined from the expression

$$\begin{aligned}
 \zeta_3 = 1 + \frac{4}{\pi^2} \int_{-1}^{+1} \bar{y}^2 \sqrt{1 - \bar{y}^2} d\bar{y} \int_{-1}^{+1} \frac{\bar{\eta}}{\sqrt{1 - \bar{\eta}^2}} \times \\
 \times \left[\frac{\bar{y} - \bar{\eta}}{(\bar{y} - \bar{\eta})^2 + 4H_0^2} - \frac{\bar{y} + \bar{\eta}}{(\bar{y} + \bar{\eta})^2 + 4H_0^2} \right] d\bar{\eta}.
 \end{aligned} \quad (27)$$

The coefficients of the effect of a solid screen's proximity on the hydrodynamic characteristics of a wing with deflected ailerons are determined from formulas

$$\begin{aligned}
 \bar{p}_y = \frac{C_{yH}}{C_{y\infty}} &= \frac{\psi \left(1 + \frac{a_0}{\pi \lambda_0}\right)}{\left(1 + \frac{a_0 \psi}{\pi \lambda_0} \zeta_1\right)}; \\
 \bar{m}_x = \frac{C_{mxH}}{C_{mx\infty}} &= \frac{\psi \left(1 + \frac{2a_0}{\pi \lambda_0}\right)}{\left(1 + \frac{2a_0 \psi}{\pi \lambda_0} \zeta_3\right)}; \\
 \bar{p}_{xi} = \frac{C_{xiH}}{C_{xi\infty}} &= \bar{p}_y^2 \frac{\left[\zeta_1 + \frac{1}{2} \frac{\left(1 + \frac{a_0 \psi}{\pi \lambda_0} \zeta_1\right)^2}{\left(1 + \frac{2a_0 \psi}{\pi \lambda_0} \zeta_3\right)^2} \cdot \frac{\alpha_\kappa^2}{\alpha^2} \zeta_3 \right]}{\left[1 + \frac{1}{2} \frac{\left(1 + \frac{a_0}{\pi \lambda_0}\right)^2}{\left(1 + \frac{2a_0}{\pi \lambda_0}\right)^2} \cdot \frac{\alpha_\kappa^2}{\alpha^2} \right]}; \\
 \bar{m}_z = \frac{C_{mzH}}{C_{mz\infty}} &= \frac{1}{3} \bar{p}_y \bar{m}_x [2\zeta_4 + \zeta_5].
 \end{aligned}$$

Function ψ can be determined from the formula

$$\psi = 1 + \tau^2 + 0(\tau^4),$$

where

$$\tau = \sqrt{\lambda^2 H_0^2 + 1} - \lambda H_0.$$

The following approximate formulas were obtained for the calculation of functions ζ_1 , ζ_2 , and ζ_3

$$\begin{aligned}\zeta_1 &= 1 - 0,5\tau^2 - 0,25\tau^4 - 0,0625\tau^6 - 0,0468\tau^8 - \\ &\quad - 0,0233\tau^{10} - 0,0199\tau^{12}; \\ \zeta_2 &= 1 - 0,375\tau^2 - 0,250\tau^4 - 0,780\tau^6 - \\ &\quad - 0,0624\tau^{10} - 0,0340\tau^{12}; \\ \zeta_3 &= 1 - 0,5\tau^2 + 0,125\tau^4 + 0,0312\tau^6 - 0,1408\tau^8 - \\ &\quad - 0,0692\tau^{10} - 0,0700\tau^{12} - 0,0356\tau^{14}.\end{aligned}$$

Graphs of functions ζ_1 (solid line), ζ_2 (dash-dot line), and ζ_3 (dash line) are presented in Fig. 2 while the graphs of the functions \bar{p}_y , \bar{p}_{x1} (solid lines) and \bar{m}_x and \bar{m}_z (dash lines) are presented in Figs. 3 and 4.

BIBLIOGRAPHY

1. Белоцерковский С. М. Тонкая несущая поверхность в дозвуковом потоке газа. «Наука», М., 1965.
2. Карафолл Е. Аэродинамика крыла самолета. Изд-во АН СССР, М., 1966.
3. Панченков А. Н. — В кн.: Гидродинамика больших скоростей, 1. «Наукова думка», К., 1965.
4. Nishiyama T. — Schiffstechnik. 1964, 11, Heft 57.

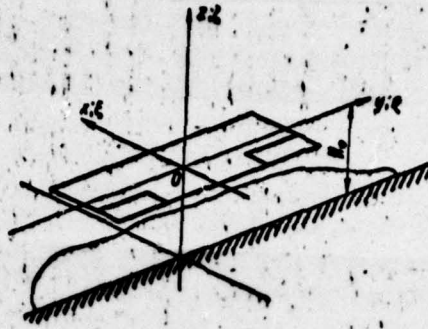


Fig. 1.

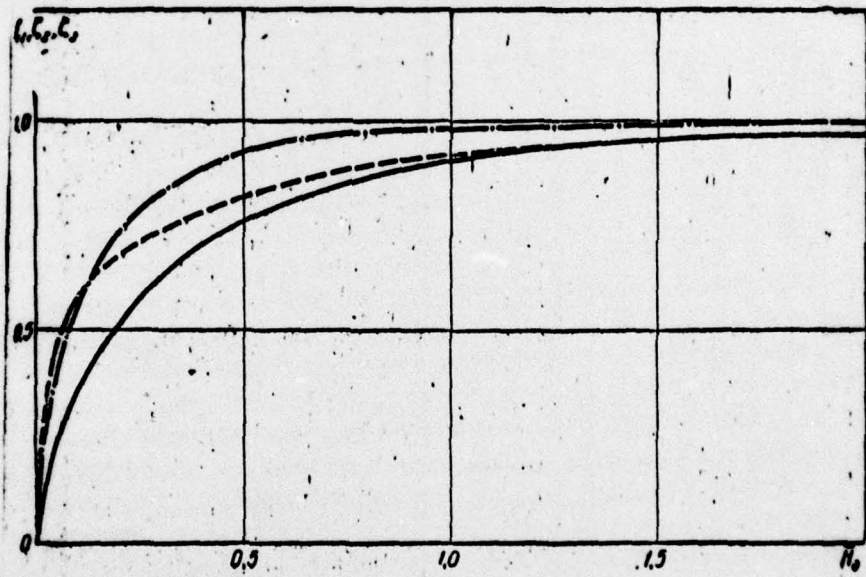


Fig. 2.

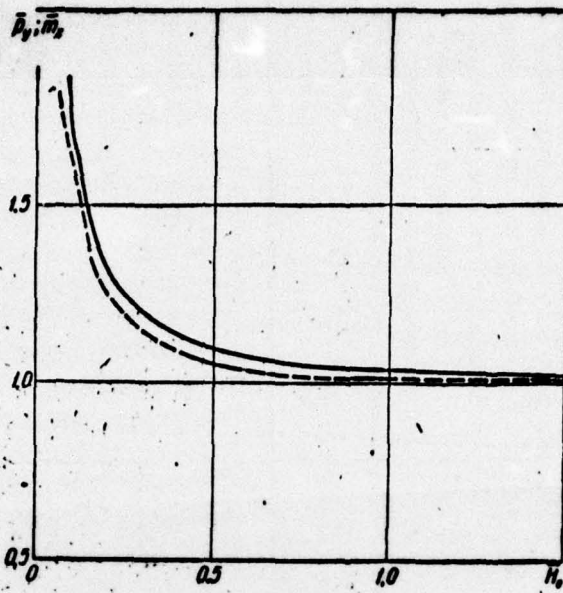


Fig. 3.

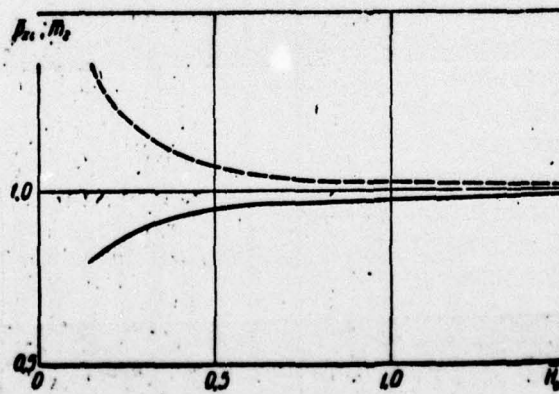


Fig. 4.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER FTD-ID(RS)T-1238-77	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) V. G. Belinskiy, Yu. I. Laptev		5. TYPE OF REPORT & PERIOD COVERED Translation
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) THE MOVEMENT OF A WING WITH DEFLECTED AILERONS CLOSE TO A SCREEN		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Foreign Technology Division Air Force Systems Command U. S. Air Force		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS		12. REPORT DATE 1968
		13. NUMBER OF PAGES 11
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number)		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) 20		

DISTRIBUTION LIST

DISTRIBUTION DIRECT TO RECIPIENT

ORGANIZATION	MICROFICHE	ORGANIZATION	MICROFICHE
A205 DMATC	1	E053 AF/INAKA	1
A210 DMAAC	2	E017 AF/ RDXTR-W	1
B344 DIA/RDS-3C	8	E404 AEDC	1
C043 USAMIA	1	E408 AFWL	1
C509 BALLISTIC RES LABS	1	E410 ADTC	1
C510 AIR MOBILITY R&D	1	E413 ESD	2
LAB/FIO		FTD	
C513 PICATINNY ARSENAL	1	CCN	1
C535 AVIATION SYS COMD	1	ETID	3
C557 USAIC	1	NIA/PHS	1
C591 FSTC	5	NICD	5
C619 MIA REDSTONE	1		
D008 NISC	1		
H300 USAICE (USAREUR)	1		
P005 ERDA	1		
P055 CIA/CRS/ADD/SD	1		
NAVORDSTA (50L)	1		
[REDACTED]	1		
NASA/KSI	1		
AFIT/LD	1		